Roof Measurement Report

3708 Ebony Hollow Pass, Austin, TX 78739, USA

July 10, 2026 | Imagery: 11/26/2023 (HIGH)

Prepared by: Stronghouse Solutions

Aerial Image




Report Summary

Measurement	Value
Total Roof Area	3,197 sq ft
Total Squares (measured)	32.00 SQ
Squares with suggested 15% waste	37.00 SQ
Total Roof Facets	12
Predominant Pitch	9/12
Ridges	68 ft (5)
Hips	145 ft (10)
Ridges + Hips	213 ft
Valleys	17 ft (1)
Rakes	54 ft (4)
Eaves / Starter	180 ft (10)
Drip Edge (Eaves + Rakes)	234 ft
Longitude / Latitude	-97.8697592 / 30.1600169

Length Diagram

3708 Ebony Hollow Pass, Austin, TX 78739, USA

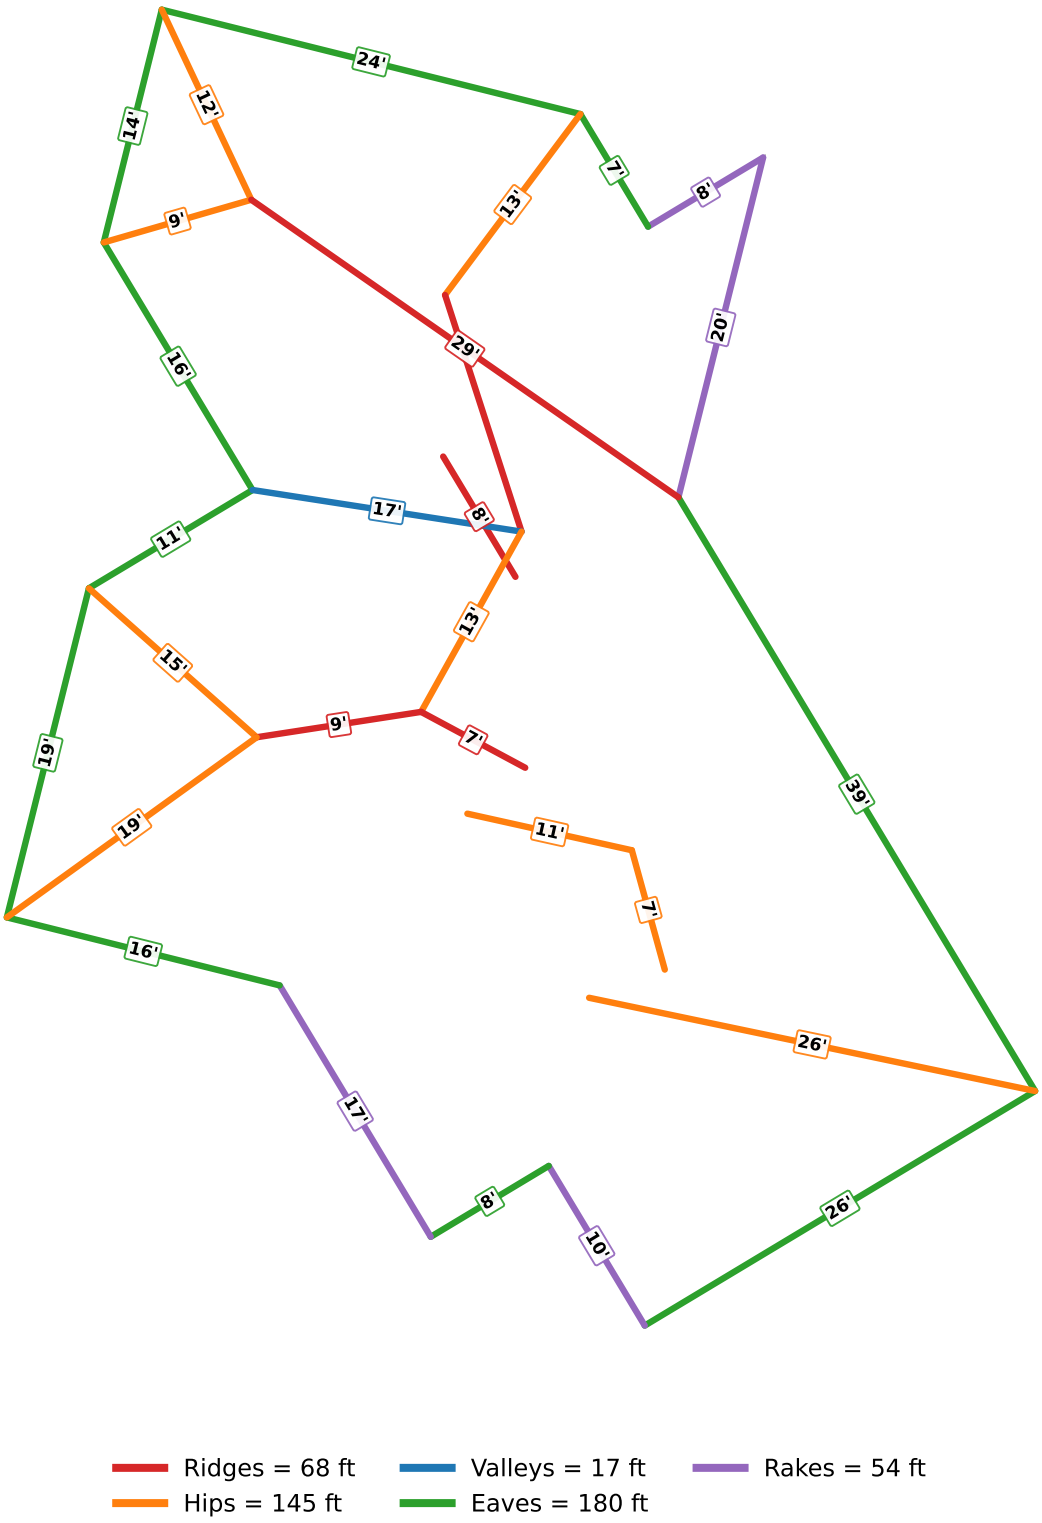


Segment labels shown for edges 5 ft and longer. Lengths are slope-corrected where applicable (hips, valleys, rakes).

Field verify measurements before material order.

Pitch Diagram


3708 Ebony Hollow Pass, Austin, TX 78739, USA | Predominant pitch: 9/12

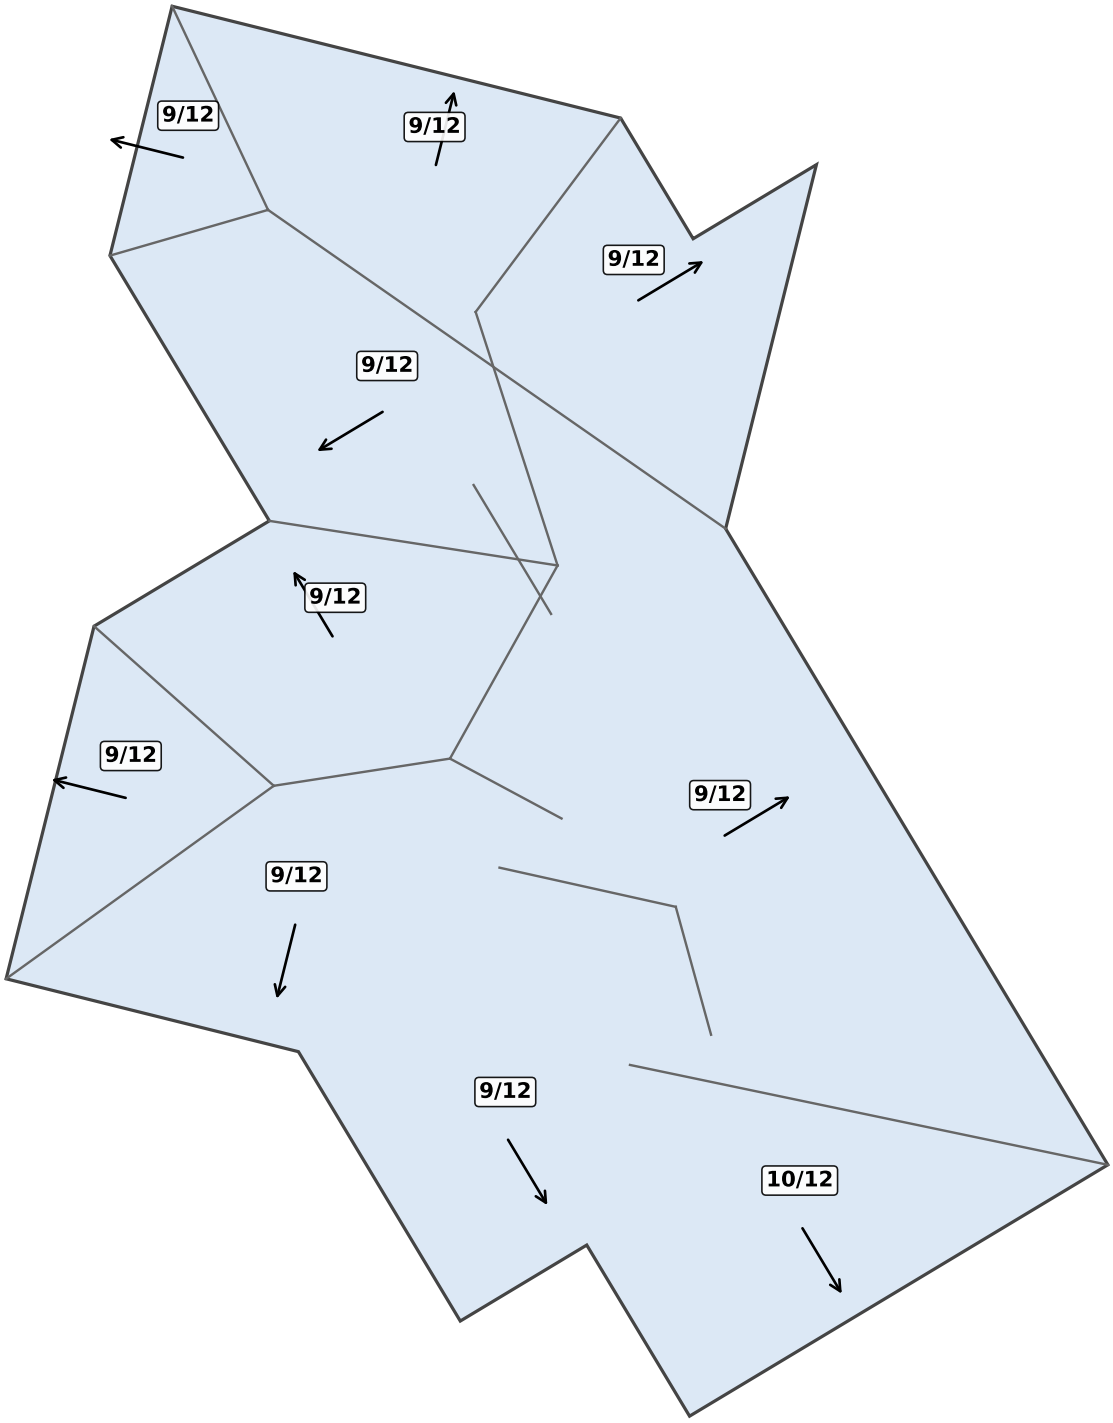

Pitch shown in inches of rise per 12 inches of run; arrows point downslope. Labels shown for facets 20 sq ft and larger.

Area Diagram

3708 Ebony Hollow Pass, Austin, TX 78739, USA | Total = 3,197 sq ft, 12 facets

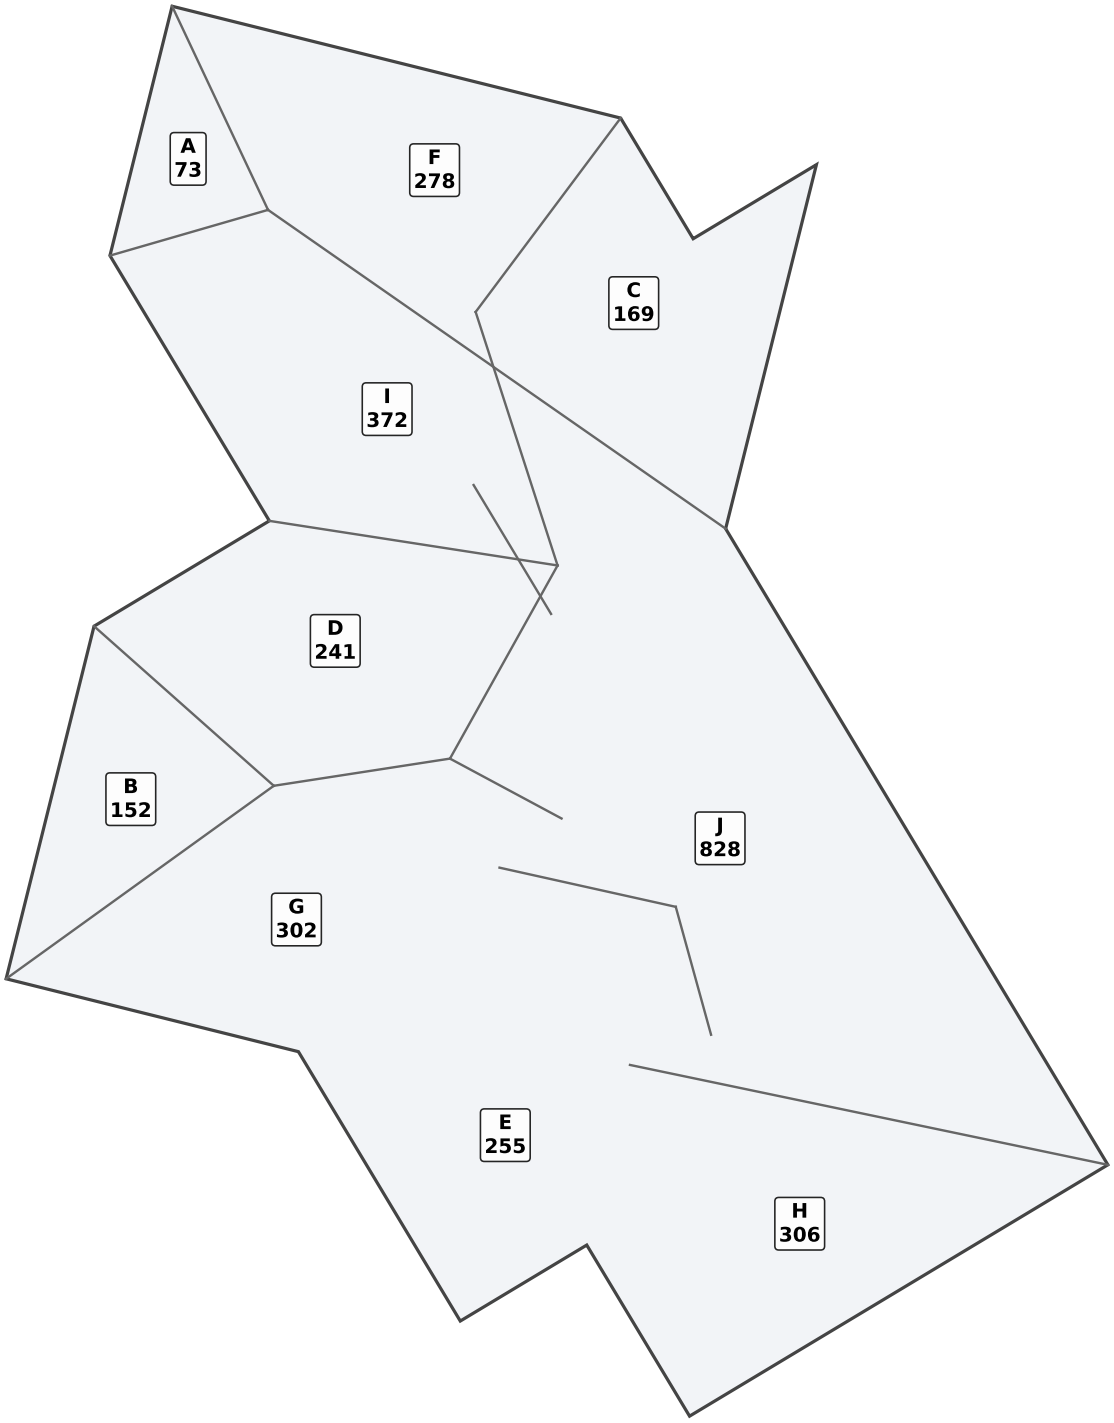

Facet surface areas in square feet (slope-corrected), labeled smallest to largest (A-Z).

Report Summary Tables

Areas per Pitch

Roof Pitch	Area (sq ft)	% of Roof
7/12	104.9	3.3%
8/12	431.0	13.5%
9/12	1,894.3	59.3%
10/12	295.2	9.2%
15/12	325.6	10.2%
18/12	145.7	4.6%

Waste Calculation (asphalt shingle)

Waste %	0%	7%	12%	17%	20%	22%	24%	27%	32%
Area (sq ft)	3,197	3,421	3,581	3,740	3,836	3,900	3,964	4,060	4,220
Squares*	32.00	34.33	36.00	37.67	38.67	39.33	39.67	40.67	42.33

*Squares rounded up to the nearest 1/3. Suggested waste factor: 15% = 37.00 SQ. Ridge/hip cap and starter material not included in waste table.

Facet Detail (largest first)

Facet	Surface (sq ft)	Plan (sq ft)	Pitch	Slope Dir (deg)
L	1,349.1	1,063.8	9/12	50
K	325.6	202.6	15/12	59
J	295.2	229.5	10/12	132
I	262.4	209.8	9/12	334
H	189.7	160.3	8/12	156
G	186.3	156.6	8/12	317
F	145.7	80.5	18/12	59
E	145.6	118.1	9/12	234
D	104.9	89.2	7/12	278
C	103.5	81.3	9/12	234
B	55.0	45.1	8/12	193
A	33.7	27.1	9/12	290

Notes & Disclaimer

- About 31% of the roof footprint was recovered from the elevation model beyond Google's solar mask (tree-shaded or obstructed areas). Edge lengths in those areas are approximate; field verify before material order.

- Linear measurements (ridges/hips/valleys/rakes/eaves) come from a geometrically consistent roof wireframe model (straight skeleton) fitted to the measured footprint and per-facet pitches.

This report was produced from satellite-derived elevation and imagery data. Accuracy can be affected by tree coverage, image resolution, recent construction, and other factors. This report does not carry an accuracy guarantee; field verification of measurements is recommended before ordering material.